


A-ALT03 single point load cell

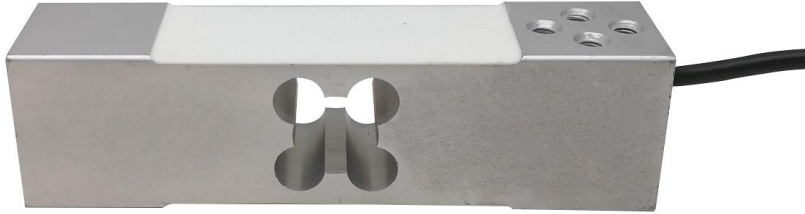


Description

Aluminum load cell, it is hermetically sealed with glue to IP65, surface anodized and anti-corrosion, integral structure and easy installation. The product is suitable for electronic top scale, floor scale and other weighing equipment.

Application

- Electronic top scale
- Floor scale
- Other weighing equipment

Main Dimensions and Accessories(mm)

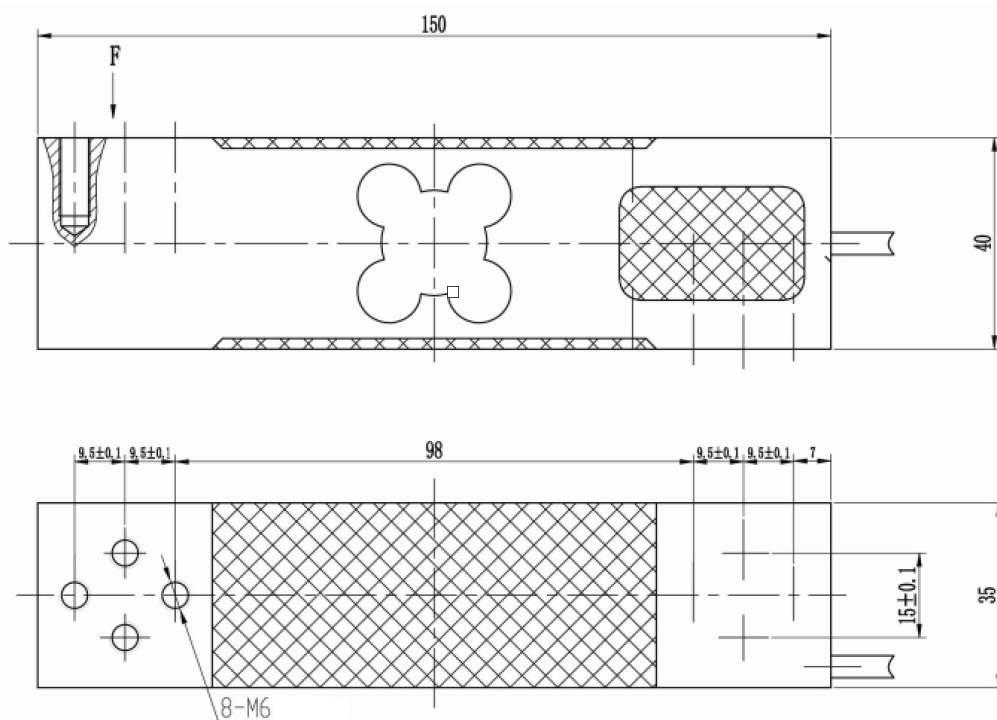

Specifications

Capacity	30~250kg	Zero balance	±2%F.S
Rated output	2.0mV/V±0.1%	Input resistance	405±10Ω
Accuracy class	C3,0.05	Output resistance	350±3Ω
Non-linearity	0.02, 0.05%F.S	Safe overload	120%F.S
Hysteresis	0.02, 0.05%F.S	Ultimate overload	150%F.S
Creep in 30 minutes	0.02, 0.05%F.S	Excitation voltage	10V AC/DC
Temperature effect span	0.015%F.S/10°C	Insulation resistance	≥5000MΩ
Temperature effect zero	0.017%F.S/10°C	Environmental protection	IP68
Compensated temperature range	-10~+40°C		
Operating temperature range	-30~+65°C	Material	Aluminum

Cable: Φ5*1.5m

Wring: +Exc (Red) ; -Exc (Black); +Sig (Green); -Sig (White)